

Flanschsteckdosen gerade


nach IEC 60309, EN 60309, VDE 0623



Flanschsteckdose gerade

spritzwassergeschützt IP54
*spritzwassergeschützt IP44

- Schraubklemmen
- geeignet für Kabelkanäle
- Mit unvernickelten Kontakten

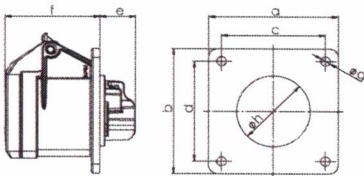

Polzahl	3	4	5	3	4	5
Ampere	16			32		
a und b	75	75	75	75	75	75
c und d	60	60	60	60	60	60
e	21	21	21	23	23	23
f	55	55	55	67	67	67
g	5,5	5,5	5,5	5,5	5,5	5,5
h	43	45	55	55	55	58
Gewicht g/Stück	120	132	150	167	182	210

Spannung		110 V~	230 V~	400 V~	440 V~	500 V~	
Frequenz		50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	
Kennzeichnung		4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h	
Ampere	Pole	Prod.-Nr.	Prod.-Nr.	Prod.-Nr.	Prod.-Nr.	Prod.-Nr.	VPE
16	3	F31S100	F31S200			F31S500	10
16*	4	F41S100	F41S200	F41S300	F41S400	F41S500	10
16	5		F51S200	F51S300		F51S500	10
32*	3	F32S100	F32S200			F32S500	10
32*	4	F42S100	F42S200	F42S300	F42S400	F42S500	10
32	5		F52S200	F52S300		F52S500	10


plug2power



Flanschsteckdose gerade

spritzwassergeschützt IP54
*spritzwassergeschützt IP44

- schraubenlose Anschluss-technik (plug2power)
- geeignet für Kabelkanäle
- Mit vernickelten Kontakten

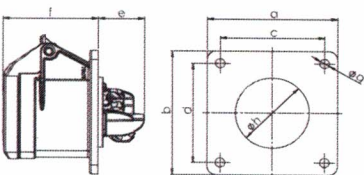

Polzahl	3	4	5	3	4	5
Ampere	16			32		
a und b	75	75	75	75	75	75
c und d	60	60	60	60	60	60
e	27	27	27	27	27	27
f	55	55	55	67	67	67
g	5,5	5,5	5,5	5,5	5,5	5,5
h	43	45	55	55	55	58
Gewicht g/Stück	123	132	155	167	182	211

Spannung		110 V~	230 V~	400 V~	
Frequenz		50/60 Hz	50/60 Hz	50/60 Hz	
Kennzeichnung		4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	
Ampere	Pole	Prod.-Nr.	Prod.-Nr.	Prod.-Nr.	VPE
16	3	F31SL11	F31SL21		10
16*	4	F41SL11	F41SL21	F41SL31	10
16	5		F51SL21	F51SL31	10
32*	3	F32SL11	F32SL21		10
32*	4	F42SL11	F42SL21	F42SL31	10
32	5		F52SL21	F52SL31	10